



# OR600Super UV DTF Printer 600mm

## Upgraded - AP Film roll to roll printing machine

No Drying  
Process Required

Good Adhesion  
on Curved,  
or Rugged Surface

UV Direct  
Print Effect

No Heating  
Process Required



ORIC UV Ink


C M Y K + W + Varnish

Wide applications suitable for surface decoration of various materials such as plastic, glass, wood, metal, leather ceramics, etc.



### SPECIFICATIONS

Model		OR600Super
Printing Technology		Three i1600 Print Heads
Printing Head		Piezoelectric Inkjet
Acceptable Media	Width	< 600mm
	Thickness	< 1.5mm
Ink Cartridge	Capacity	Colour Siphon + White Ink Auto stirring
	Colour	CMYK+W+Varnish
Printing Resolution		Maximum 2400 dpi
Speed		8pass (720x1200dpi) 7m2/h
Ink Curing Method		Dual UV LED Lights
Power		3500W
Interface		Gigabit Ethernet
Power Supply		AC 220V +/-10%, 50/50HZ
Dimensions (with stand)		69.76W x 28.6D x 55.9H in. (1772W x 927D x 1420H mm)
Weight (with stand)		441 lb. (200 kg)
Environment	Power On	Temperature: 59oF to 90oF (15oC to 32oC) / Humidity: 35 to 80% (no condensation)
	Power Off	Temperature: 41oF to 104oF (5oC to 40oC) / Humidity: 20 to 80% (no condensation)

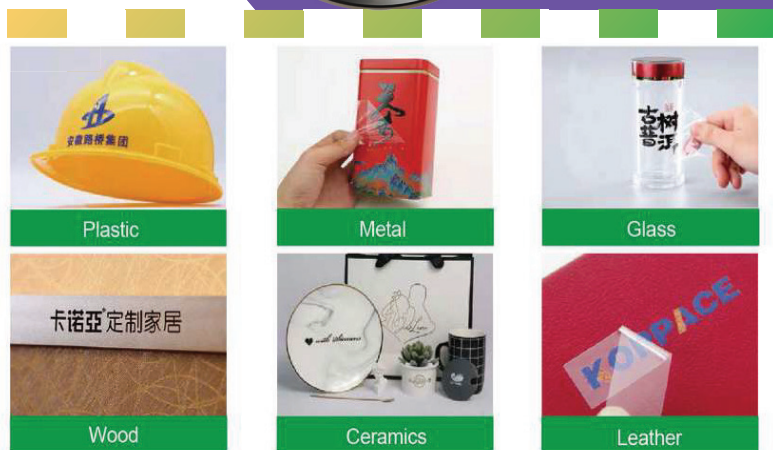

- Scratch-resistant and durable
- Strong adhesion to most surfaces
- Bright color, good quality of finished products, beyond your imagination
- Waterproof, lightfast and dirt-free
- Applicable to hard, flat or curved surfaces
- Metallic effect with golden or silver colors, a difference that makes difference



**WESTERN CAPE**  
COLORSCREEN (CAPE)  
7 Puma Street, Paarden Eiland  
Cape Town, 7405, R.S.A.  
Telephone: +27 (0) 21 511 6750  
Email: info@colorscreen.co.za

**KWAZULU-NATAL**  
COLORSCREEN (KZN)  
Unit 1, 87 Marseilles Crescent  
Briardene Industrial Park  
Durban North, 4051, R.S.A.  
Telephone: +27 (0) 31 563 4237  
Email: info@colorscreen.co.za

www.colorscreen.co.za



@ColorscreenSouthAfrica



colorscreen\_southernafrica



# OR600Super UV DTF Printer 600mm

## Upgraded - AP Film roll to roll printing machine

No Drying  
Process Required

Good Adhesion  
on Curved,  
or Rugged Surface

UV Direct  
Print Effect

No Heating  
Process Required



ORIC UV Ink


C M Y K + W + Varnish

Wide applications suitable for surface decoration of various materials such as plastic, glass, wood, metal, leather ceramics, etc.



### SPECIFICATIONS

Model		OR600Super
Printing Technology		Three i1600 Print Heads
Printing Head		Piezoelectric Inkjet
Acceptable Media	Width	< 600mm
	Thickness	< 1.5mm
Ink Cartridge	Capacity	Colour Siphon + White Ink Auto stirring
	Colour	CMYK+W+Varnish
Printing Resolution		Maximum 2400 dpi
Speed		8pass (720x1200dpi) 7m2/h
Ink Curing Method		Dual UV LED Lights
Power		3500W
Interface		Gigabit Ethernet
Power Supply		AC 220V +/-10%, 50/50HZ
Dimensions (with stand)		69.76W x 28.6D x 55.9H in. (1772W x 927D x 1420H mm)
Weight (with stand)		441 lb. (200 kg)
Environment	Power On	Temperature: 59oF to 90oF (15oC to 32oC) / Humidity: 35 to 80% (no condensation)
	Power Off	Temperature: 41oF to 104oF (5oC to 40oC) / Humidity: 20 to 80% (no condensation)

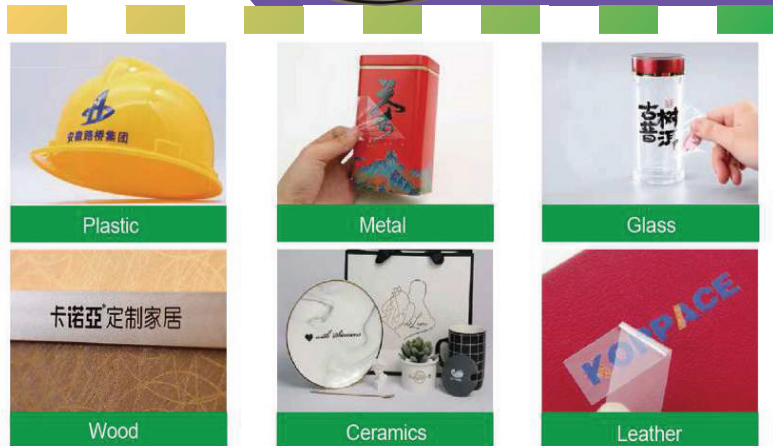

- Scratch-resistant and durable
- Strong adhesion to most surfaces
- Bright color, good quality of finished products, beyond your imagination
- Waterproof, lightfast and dirt-free
- Applicable to hard, flat or curved surfaces
- Metallic effect with golden or silver colors, a difference that makes difference